



ACO Drainage System
Xtraline

Product Features and Benefits



SMOOTH AND WATERTIGHT SURFACE

The smooth and impermeable surface guarantee the maximum water flow.



DURABLE

PE-HD is affected more slowly by degrading agents such as light, wind, dust, pollutants, micro-organisms and extreme environments.



EASY TO CONNECT

The smooth waterproof surface lets the water flow quickly away and is easier to clean, thus preventing the formation of pesticide residues.



STRONG

PE-HD is very resistant: mechanically, to impact, to temperature changes, to friction and to wear. So there is no loss of material during transport and installation.



EASY TO TRANSPORT & STOCK

The special design optimize the transport and shipping, taking less warehouse space during the stocking.




UV RESISTANT

The HDPE used for the channels is additivated with black colour master that guarantees the long life resistance again the UV ray.




QUICK INSTALLATION

The Lightness make the installation fast and simple. It is not request any machinery



THERMAL EXPANSION

The HDPE thermal expansion coefficient is higher than the concrete coefficient.



MALE – FEMALE JOINT

The connection between different channels is guarantee with male-female joint.



SAFETY

All the channels and gratings are tested in notified laboratory according EN1433.



Benefits :


50% cost savings on installation



RECYCLABLE

All PE-HD channels are completely made from recycled material, witch is itself 100% recyclable.

Product Range

LOAD CLASS	CHANNEL & GRATINGS					
	200		100		90	
	XTRALINE C	XTRALINE G	XTRALINE		EASYLINE	HEXALINE
			MESH	BRICKSLOT	MESH	BRICKSLOT
 A15	 840426	-	 810419	-	 853001	 853520
 B125	 840454	-	 840511	-	-	-
 C250	 840456	-	 840434	 841050  841051  851052	-	-
 D400	-	 840410	-	-	-	-
 E600	-	 840412	-	-	-	-
 F900	-	 840414	-	-	-	-

Accessories



Bolt and bar kit + M8x40 TBL combi screw



Bolt and bar kit + M8x40 black hex head screw



Close end-cap



Ø75 outlet en-cap
Ø110 outlet end-cap



Closed end-cap with
Ø160 knockout



Step connectors from
100 mm to 160 mm
160 mm to 250 mm



Sump unit with female-female connection


ACO Hexaline

HexaLine is a recyclable polypropylene trench drain system with a range of innovative features making installation easier than ever.

The lightweight, cellular construction allow for a simple 'push-fit' of channels and accessories and makes cleaning and maintenance easy.

Typical applications

- Residential driveways
- Patios
- Walkways
- Basements
- Pools

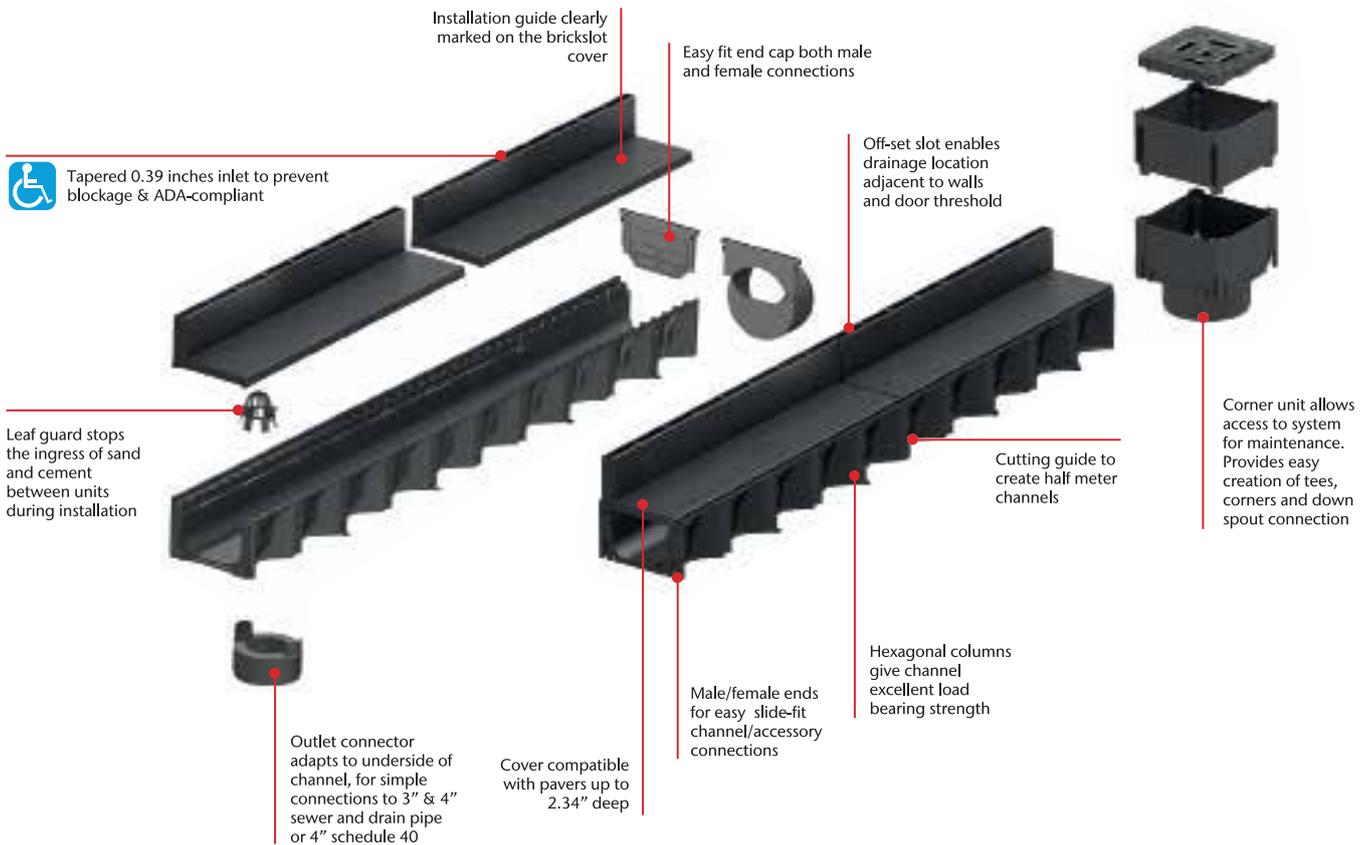

ACO Easyline H90 Pack

Product Information

- The pack contains:
 - 3 PP-PE channels, 3 gratings, 2 open end caps, 1 closed end cap
- 4 side connections each channel
- Plastic rail 5mm thickness
- Gratings load class: A15, B125
- Built-in fixing system
- Wide range of gratings
- Available in Black and Grey color



Category & Application

House & Garden



Roads & Public Space




Logistic & Factory



Infrastructure & Transportation



Application

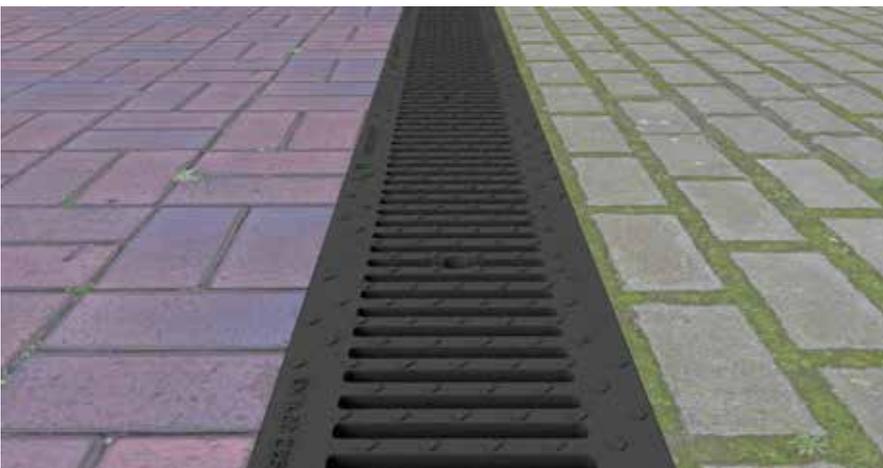



 @aco_indonesia  www.lapakarsitek.com

Head Office

Jakarta

Rukan Citta Graha 3E,
Jl. Panjang No. 26 Kedoya Selatan
Jakarta 11520

+62-21 2942 7688 / 2258 4128

+62-81 789 6789

info@aluveen.co.id

Showroom

Alam Sutera

Open Door 29th | The Flavor Bliss
Jl. Alam Sutera Boulevard No.29,
Pakulonan, Serpong Utara,
Tangerang Selatan, Banten 15325

+62-81 789 6789

info@aluveen.co.id

Bandung

Jl. Ratnaniaga 25,
Kota Baru Parahyangan Cipeundeuy,
Kec. Padalarang, Kab. Bandung Barat
Jawa Barat 40553

+62-81 789 6789

info@aluveen.co.id

Semarang

Alternative Building

Jl. Agus Salim Ruko THD A3
Semarang

+62-24 354 0215

info@aluveen.co.id

Surabaya

Puncak CBD, Ruko 8C-PSR
Surabaya, Jawa Timur 60241

+62-81 789 6789

info@aluveen.co.id

Yogyakarta

Qhomemart

Jl. Raya Janti Ringroad Timur
No.96, Jaranan, Banguntapan,
Bantul, D.I Yogyakarta

+62-81 789 6789

info@aluveen.co.id

Bali

Jl. Dewi Sri VIII, Pertokoan Plaza 18,
Blok B No. 6, Kuta - Bali 80361

+62-361 472 6071

+62-81 789 6789

info@aluveen.co.id